




Guiding the Way



6.5 lbs / 2.95 kg

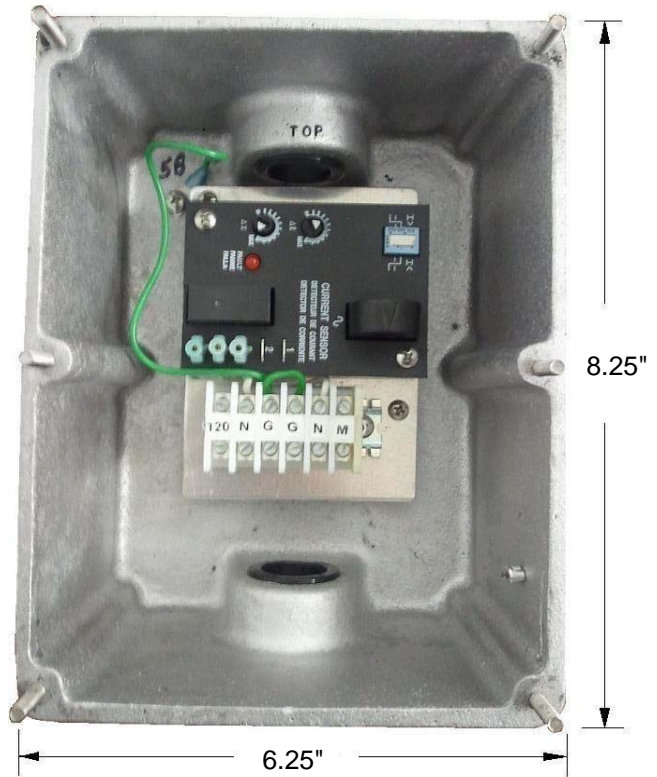

6.25"

AO HEAVY DUTY RED LED LIGHT CONTROLLER

Modeled for use with LED L810 Marker Light

Features	Benefits
120, 240 50/60HZ	Multiple Voltage Input for diverse application
Photo Electric Control ON @ 35 FC / OFF @ 60 FC	Per FAA requirement
Cast Aluminum Enclosure	Heavy Industrial Atmosphere
Screw terminals	Standard, no special connection devices needed
Fused	In-line Over-current Protection
Marker Monitoring	Standard per level monitoring. Can Monitor one failure on multiple levels with only one output
Programming and resetting not required	Microprocessors will not reset if power is lost
Field Adjustable	Monitoring settings based on tower configuration and can be adjusted at the installation location
Easy Monitoring of RTO 860 L810 Marker Lights	RTO & 860 side selector
Mode Monitoring	Form C Contact for Mode Change